


Additive Floor® Assembly recommendations

Installation

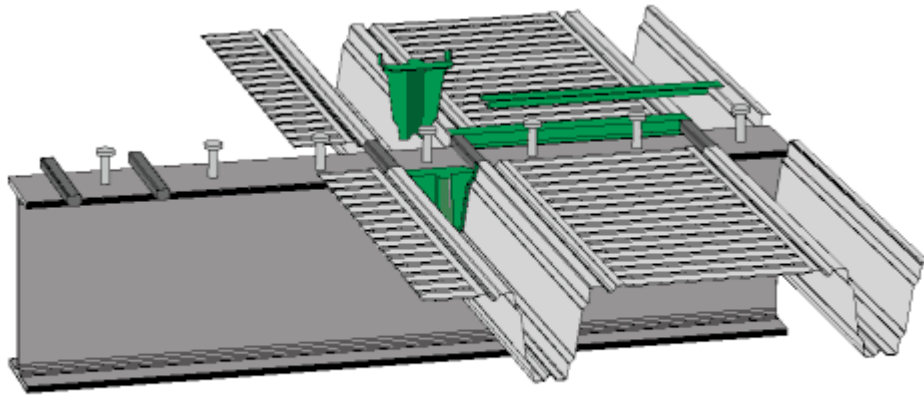

The trapezoidal panels are laid manually. They are fastened to steel cleats using shear connectors. For connecting the longitudinal joints, officially approved fasteners must be used. When the Additive® Floor is installed in car parks, the longitudinal joints are fastened using stainless steel screws. For concrete pouring, the trapezoidal profiles are sealed against the upper flanges using folded Z profiles. In profile ribs of various sizes, plastic form parts are used (system accessories).

Final cleaning

When using the Additive® Floor as a floor soffit, it should be cleaned with water following concrete pouring.